



Ideal for the application of biocides, fungicides,
pesticides, insecticides, mosquito control chemicals,
sanitizers & deodorizers.

FogstarPro™



Electric Cold Fogger generates a fog or mist formed of **Ultra Low Volume (ULV)** droplets between 5-25 microns (μm) in diameter and fogging range upto 20-25ft.

Ideal for indoor applications as they don't produce exhaust gases and are less noisy & can apply both oil and water based solutions.

Engineered and designed for controlling mosquitoes and other potentially hazardous flying insects, the Fogstar Pro™ is extremely effective in eliminating mosquitoes/pests that carry the deadly disease virus when used with approved insecticides and pesticides.

RANGE OF TREATMENTS

- Mosquito control treatment
- Pest & insect control
- Disinfection and sanitizing
- Infection control
- Mold remediation
- Humidification
- Disease control in epidemic
- Deodorization



FEATURES

- Generates ultra fine fog to heavy & wet fog.
- Precision metering valve controls liquid output & droplet size. low flow rate to produce near-invisible ULV droplets.
- Provides highly effective treatment with lesser chemicals used & least wastage or overdose.
- The heavy duty turbo blower generates large aerosol volume covering long distances & larger space.

Savings in treatment time & labor costs.


- Low maintenance & Light weight with adjustable spraying head for multi-angle spraying
- Leak- and spill-proof plastic tank (translucent for viewing liquid level) with level markings.
- No pressurized tanks or hazardous liquid fuels required.

APPLICATION AREAS

Hotels, Restaurants, Kitchens, Residential facilities, Commercial establishments, Schools, Institutions, Warehouses, Greenhouses, Waste disposal, Factories, Animal houses, Healthcare facilities & Food processing plants.



Anti mildew treatment

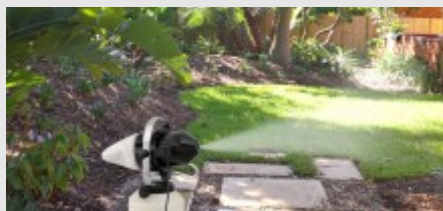

Mosquito control in backyard

SPECIFICATIONS

Power Supply	:	220/240 V AC, 4.2 amps, 50/60 Hz
Spread & Reach	:	25ft. distance & 15ft. height
Particle Size	:	5-25 microns
Nozzle Assembly	:	Non reactive engg. Plastics
Precision Metering Valve	:	0-120 ml/ minute (Adjustable)
Power head motor Housing	:	Engg. plastics, Electric shock proof
Tank capacity	:	5 Litre engg. Plastics.
Empty Weight	:	5.5 kg portable



Radiant Enterprise

Bio-Security Solutions

An ISO 9001 Certified Company

C/101, 1st Floor, Shivalik Business Center,
B/h, Rajpath Club, off S.G. Highway, Bodakdev, Ahmedabad -380059. INDIA
Ph. 079-26449120, 40077319.

Mo. +91 9825050930, 9909006645, 9909006620.

www.radiantinnovations.in • www.fogstarindia.com • <http://www.indiamart.com/radiant-enterprises/>
Email: info@fogstarindia.com • sales@fogstarindia.com